

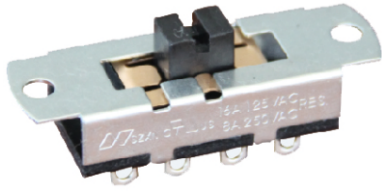


Since 1995, we focus on switches

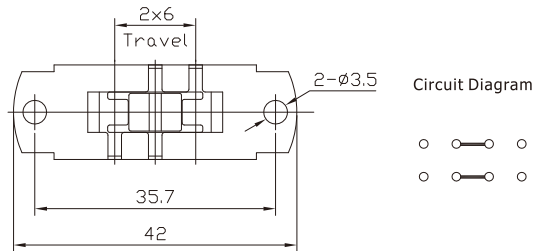

XN-1-2316-CLN


- Single/Double Pole; Single/Double Throw
- Ratings:
16A 125VAC; 8A 250VAC, UL
8A 250VAC; TUV, CQC
- Features:
Knob, Terminal & Casing Options see selections guide

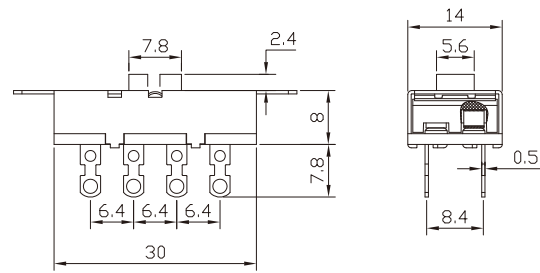


XN-1- 2316 - XXXX

Double Pole	2	3	1	6	-	XXX	X	Housing Code
3 Position								Terminal Code
Current at 125VAC								Actuator Code

Actuator Options

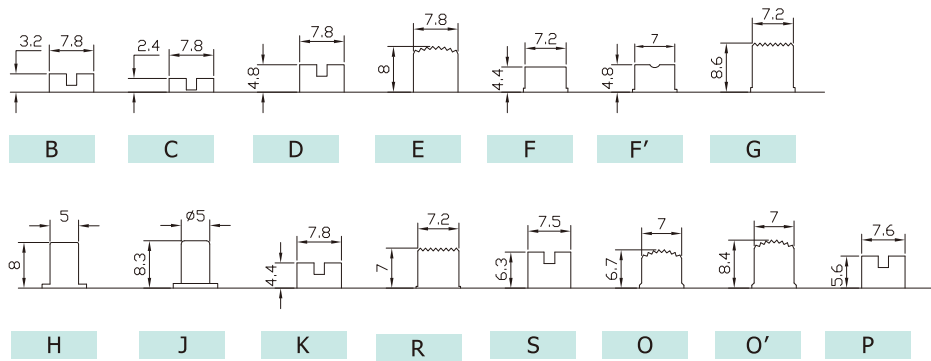

Terminal Options

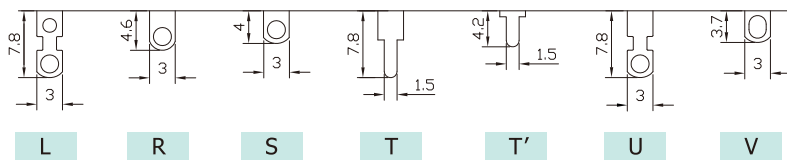

Housing Options

